

Eagle-Eye™ Alarm



KEY INSTRUMENTS

250 Andrews Road • Treviso, PA 19053 • 800.356.7483 • 215.357.0893 • Fax: 215.357.9239
www.keyinstruments.com • Email: sales@keyinstruments.com

Eagle-Eye™ Alarm



FEATURES

- Integral red and green LEDs and audible buzzer indicate operating state
- Included spacers allow usage with FR Series Acrylic Flowmeters (*See Compatibility Table)
- Non-contact sensor is not affected by contaminants in the flow stream
- Field installable, flowmeter may remain in service during installation
- Multiple operating modes:
 - Standard – Unit will alarm until reset by the user
 - Automatic Reset – Unit will alarm until flow returns to acceptable levels
- Multiple units may be installed on a single flowmeter to provide multiple thresholds
- Rugged, splash resistant enclosure
- Low level digital output represents operating state, available with advanced power supply




Advanced Power Supply

SPECIFICATIONS

Meter Compatibility	FR Series Flowmeters*
Body Material	ABS
Spacer Material	SBR
Operating Temperature Range	0 - 70°C; 32° - 160°F
Supply Voltage	5VDC Regulated
Supply Current	250mA
Output Signal (Requires Advanced Power Supply)	0-5 Volt Signal
Connector	RJ11
Environmental	Splash Resistant
Buzzer Volume	90dB

Specifications are subject to change without prior notification.
Consult factory for latest data.

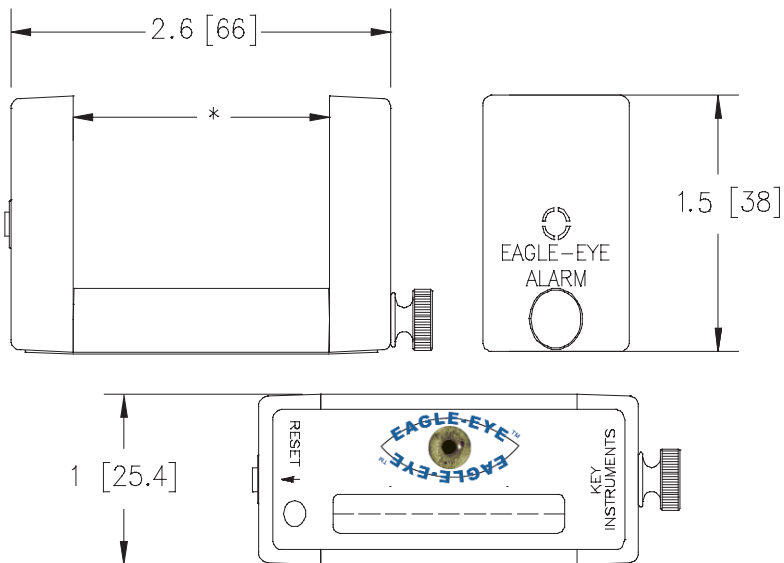

Patent Pending

ORDERING INFORMATION

Eagle-Eye™ Alarm with Spacer Blocks	EEKIT001
ACCESSORY PRODUCTS	
Basic Power Supply 120VAC to 5VDC	EPS003
Advanced Power Supply Universal Input with Battery Backup & Logic Output Includes Multiple Blades for International Power Outlets	EPS004

*FR SERIES COMPATIBILITY

Compatible FR Meters

FR2000
FR4000
FR4400
FR4500
FR4700
FR4800
FR5000



KEY INSTRUMENTS